


# NIGHT RANGER

## Infrared PTZ Camera

Extreme Environments? No Problem!



Manual Speed	Horizontal (0.4°~180°/S) Vertical (0.4°~80°/S)
Rotation	Pan 360° continuous, Tilt 0-90° Auto Flip
Rotation Speed	Rotation Speed auto adjust base on the focal length
IR Distance	390' feet
PRESET	128
SCAN	355°, 4 tour
Display zone	8 programmable zone with title
Decoder	Built in
Alarm	7 alarm input, 2 alarm output
Video output	1.0Vp-p,75Ω, BNC Connector
Communication	RS485 Bus
Protocol	PELCO-D, PELCO-P, KALATEL, VCL, MOLYNX, VICON etc.
Baudrate	2400 / 4800 / 9600 / 19200 bps
Camera ID	1~254
Temperature	-40°F~140°F
Humidity	0~95% (none condensation)
Protection	IP67,4000W Lighting-proof,Surge-proof,wave-proof
Power Supply	AC 24V±4V
Power Consumption	(PTZ+IR) 33W (PTZ+IR+Heater) 53W
Dimension	17.42"(L) × 12.63" (D) × 7.87" (w)
Weight	21.35 Pounds
<b>Camera Module</b>	
Image Processor	1/4" Sony EXview HAD CCD
Resolution	530 TVL
Illumination	Color 1.4 LUX, B&W 0.1 LUX
Optical zoom	36X (f = 3.4 - 122.4mm)
Digital zoom	12X
WDR	YES

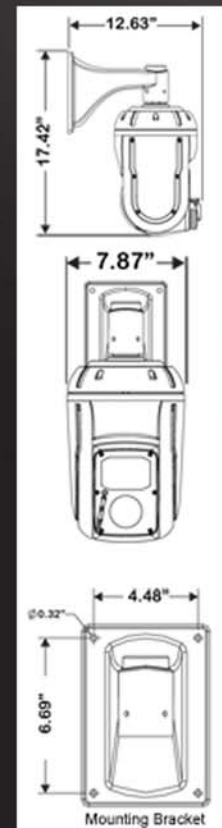

© Rugged Cams™ are manufactured by Rugged CCTV. All rights reserved.

[www.rugged-cctv.com](http://www.rugged-cctv.com)

Rugged-cctv  
201 North Elm St.  
Kemp, TX. 75143  
1-866-301-2288